

ORGANISATION DETAILS			
Organisation Name:	Gedoun Constructions Pty Ltd	Contact Name:	Joe Gedoun
ACN/ABN:	52 284 873 581	Contact Position:	Director
Address:	PO Box 1138, Townsville QLD 4810	Contact Phone Number:	0412 968 974

PROJECT DETAILS			
Project:	Gedoun Construction Sites	Project Address:	Gedoun Construction Sites
Project No:		This WMS has been developed in consultation with:	Joe Gedoun
Activity:	Oxy Cutting		Reviewed by:
		Position:	Contract Administrator
Training/Instructions to be provided:	<input checked="" type="checkbox"/> Site Induction Training <input checked="" type="checkbox"/> OHS Induction Card Training <input checked="" type="checkbox"/> Manual Handling Training	<input checked="" type="checkbox"/> Task Specific Training, Manual Handling Training <input checked="" type="checkbox"/> Training Specified in any MSDS <input checked="" type="checkbox"/> Other (Specify): Competency in Operating Oxy/Acetylene	
Resources/Trades Involved:	Labourer and Tradesmen	Engineering Details/Certificates/EPA/QLD Work Place Health & Safety Approvals:	Hot work
Plant/Equipment Used:	Oxy/Acetylene kit	Warning Signs and Controls Measures:	As per Displayed Signage
		Details of Emergency Procedures:	As per Site Safety Plan
Personal Protective Equipment (PPE) to be used:	High Visibility Clothing and Safety Footwear (Steel Capped Boots) are to be worn by ALL worksites. Fire retardant material long sleeve shirt, trousers, safety helmet, safety glasses, rescue kit, low voltage insulating gloves. Task specific gloves, welding goggles.	Safety Data Sheets Required:	NIL


PROJECT DETAILS			
<p>Occupational Health Safety or Environmental Legislation:</p>	<ul style="list-style-type: none"> • Queensland Acts & Regulations • Workplace Health & Safety Act 2011, Workplace Health & Safety Regulations 2011 • Electrical Safety Act 2015, Electrical Safety Regulations 2013 • Building and Construction Industry Improvement Acts 2005 	<p>Codes and/or Standards Applicable to the Works:</p>	<p>Building Code of Australia 2010 Queensland & National Codes of Practice:</p> <ul style="list-style-type: none"> • Building and Construction 2000 Updated 2011 • Noise 2004 • Scaffold 2009 • Electrical 2013 • Manual Tasks 2010 • Plant 2013 • First Aid 2015 • Hazardous Substances 2011 • Prevention of Falls in Housing Construction 2012 • Construction Work 2013 • Building Code of Australia 2015 • Hazardous Substance Code of Practice 2003 <p>National Standards:</p> <ul style="list-style-type: none"> • Risk Management AS/NZS15031000:2009 • National Standard for Construction Work NOSHC:1016 (2005) • National Standard for Manual Tasks 2007

HIGH RISK ACTIVITY: OPERATING A BOOM LIFT

JOB STEP	POTENTIAL HAZARDS	RISK SCORE (Before Control Measures)			CONTROLS	RESIDUAL RISK (After Control Measures)			PERSON RESPONSIBLE
		L	C	R		L	C	R	
		Operating Oxy/Acetylene	<ul style="list-style-type: none"> - Faulty or damaged equipment - Injury to co-workers or public-burns - Fire/smoke damage - Vapour/ fumes - Explosions 	4		3	12	<ul style="list-style-type: none"> - Ensure that the appropriate permits have been provided, read and signed. - Ensure that fire extinguishers are available and operational. - Check the correct P.P.E gasses are available. - Oxygen and acetylene cylinders shall be in a secured, upright and cool position. - All hoses to be free from damage, kinking and grease and oil residues. - Gauges and Flash back arrester shall be fitted and in a serviceable condition and be checked for leaks with soapy water. - Install physical barriers when outside workshop environment. - Complete hot work permit if outside of workshop environment. - Risks assess and clear the surrounding area for combustible hazards. - Check area for fire etc. on completion of works. - Use relevant respirator if required. - Check for gases and utilize the suitable ventilation. - Remove all contaminants and rust deposits before cutting. - Do not light torch with matches or cigarette lighter. 	

RISK MATRIX					
LIKELIHOOD	CONSEQUENCES				
	INSIGNIFICANT (1)	MINOR (2)	MODERATE (3)	MAJOR (4)	CATASTROPHIC (5)
RARE (1)	Low (1)	Low (2)	Low (3)	Moderate (4)	Moderate (4)
UNLIKELY (2)	Low (2)	Moderate (4)	Moderate (6)	Moderate (8)	High (10)
POSSIBLE (3)	Low (3)	Moderate (6)	Moderate (9)	High (12)	High (15)
LIKELY (4)	Moderate (4)	Moderate (8)	High (12)	Catastrophic (16)	Catastrophic (20)
ALMOST CERTAIN (5)	Moderate (5)	High (10)	High (15)	Catastrophic (20)	Catastrophic (25)

If the residual risk is	Catastrophic (16+)	Then	Work is unable to proceed. Seek other methods (Significant)
	High (10 – 15)	Then	Permission from High Level Management for work to proceed (Significant)
	Moderate (4 – 9)	Then	Permission from Worker in Charge for work to proceed (Insignificant)
	Low (1 – 3)	Then	Work able to proceed (Insignificant)

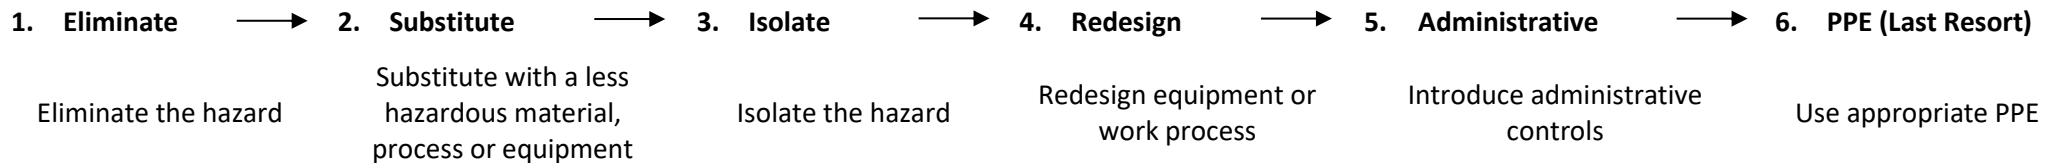





C = Consequence

- 5 = **Catastrophic** = Fatality, permanent disability, long term widespread impacts, huge financial loss
- 4 = **Major** = Permanent disability or extensive injuries, medium to long term widespread impact, major financial loss
- 3 = **Moderate** = Lost time injury, reversible medium term local impact, high financial loss
- 2 = **Minor** = Medical treatment, reversible short – medium term impact to local area, medium financial loss
- 1 = **Insignificant** = First aid, limited impact to minimal area, low financial loss


L = Likelihood

- 5 = **Almost Certain** = It is almost certain that the risk will occur in most circumstances
- 4 = **Likely** = The risk is likely to occur in most circumstances
- 3 = **Possible** = There is uncertainty that the risk could occur
- 2 = **Unlikely** = The risk could occur at some time but there is confidence that it will not
- 1 = **Rare** = The impact/risk may occur only in exceptional circumstances

**I HAVE BEEN CONSULTED AND I ASSISTED IN DEVELOPPING THE WORK METHOS STATEMENTS THAT APPLY TO MY WORK ACTIVITIES.
I WILL COMPLY WITH ITS SAFE WORK PRACTICE.**

PRINT NAMES	POSITION/TRADE	SIGNATURE	DATE
JOE GEDOUN	DIRECTOR/SITE MANAGER		16 October 2017
MATTHEW CARROLL	SITE SUPERVISOR		16 October 2017
BOYD TURNER	SITE SUPERVISOR		16 October 2017
CRAIG PENSINI	SITE SUPERVISOR		16 October 2017

MONITORING AND REVIEWING OF WMS USE AND EFFECTIVENESS

NAME	SIGNATURE	DATE
STACY JACOBSEN		16 October 2017